



Introduction

XLR condenser microphone

M12C is a high quality handheld condenser microphone, great for those times when you need to capture your recording without having to set up a condenser shock mount stand.


Key Features

- ▶ Durable metal body
- ▶ Cardioid pickup to reduce unwanted noise
- ▶ Balanced XLR connector

Specifications

MODEL NAME	M12C
Element	34mm Ø Pressure gradient transducer
Polar pattern	Cardioid uni-directional
Frequency Response	20Hz - 20kHz
Sensitivity	-32dB±2dB (0dB=1V/pa at 1kHz
Output impedance	200Ω±20% at 1kHz
Load impedance	≥1000Ω
Noise	14dB A
Max input SPL	135dB at 1kHz 1% THD
PS/N ratio	80dB
ower requirement	+48V phantom power
Current consumption	3mA
Body dimensions	56mmØ x 185mm



Frequency response diagram

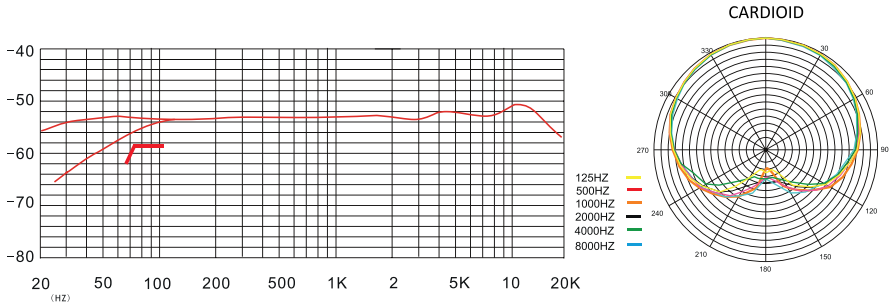

To connect an XLR cable

1 To hold the M12C in one hand and your 3-pin XLR cable in the other, align the slot on the XLR cable to the groove on the inside of M12C body and insert. Ensure that the XLR cable 'clicks' into place so that it can not be removed unless the release latch is used.

2 Please ensure the XLR cable you are using is wired correctly to match the output pins on the M12C. You may of course use XLR-XLR, XLR-jack, or XLR-mini jack plugs depending on your relevant input socket.

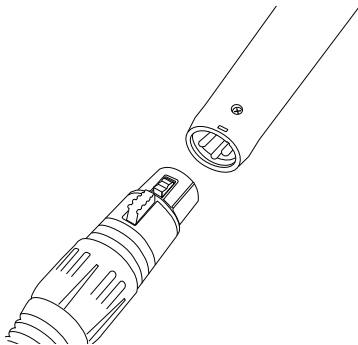

What's in the box

- 1 x AUDIQ M12C XLR condenser microphone
- 1 x CONNEQ CL2 microphone clip
- 1 x CONNEQ MS2T table top stand
- 1 x CONNEQ WS1 windshield
- 1 x User Guide